

NITE-RF

Unmanaged Industrial Ethernet Switch RJ45
Full Gigabit Ethernet



Space-saving networking in the cabinet with high bandwidth and 32.5 mm installation depth

- ▶ Flexible use with 24 VAC/VDC
- ▶ Minimal installation depth 32.5 mm
- ▶ Temperature range -40 to +70°C
- ▶ Polarity protection
- ▶ 9 kB Jumbo Frames Support
- ▶ Inrush current limitation
- ▶ Stable mounting on 35mm DIN rail
- ▶ PROFINET suitable

Unmanaged Industrial Ethernet Switch RJ45

Full Gigabit Ethernet



With an installation depth of only 32.5 mm and a height of 105 mm, the Industrial Ethernet switches impress with their extremely flat and high-quality aluminium housing. The ultra-compact switches can be used in any control cabinet thanks to the 24 VAC/VDC power supply with inrush current limiting and reverse polarity protection. Due to the reduced footprint and the arrangement of all connections on the front, switch cabinets and cabling can be optimized to reduce the costs. The high-quality DIN rail holder made of metal ensures a firm and secure hold on the DIN rail. Like all TERZ Industrial Ethernet switches, the flat NITE-RF are available in two frame forwarding variants and fully suitable for PROFINET applications.

General

Switch: IEEE802.3 Store and Forward; non-blocking wire speed

Auto-Negotiation, Auto-MDI-X, Auto-Polarity: Yes

Frame size: 9,216 Bytes Jumbo Frames

MAC table size: 2,000 addresses

Quality of Service: Yes – 8 priority queues

Energy Efficient Ethernet: No

Flow Control: No

PROFINET suitable: Yes

Port count (RJ45)	5	8
MTBF (SN 29500, Mio. h)	2,028	1,434
Frame Forwarding (Art.-No.)	xxxxx0	xxxxx1
LLDP, PTCIP Delay 01:80:C2:00:00:0E	Forwarding	Blocking
RSTP BPDU 01:80:C2:00:00:00	Forwarding	Forwarding

Power supply / electronics

Nominal voltage: Vin 24 VAC 50/60 Hz / 24 VDC

Permitted voltage range: 12 to 28 VAC / 9 to 36 VDC

Connection type: 3-pole pluggable, screw connector (+ - FE)

Wire cross-section: 0.75 to 2.5 mm² (AWG 20 to 13)

Supply circuit: SELV DIN 60950 (circuit breaker 10 A)

Inrush current limiter: Yes

Input fuse: Yes, Interrupting rating 50 A @ 125 VAC / VDC

Polarity protection: Yes

PCB Conformal Coating: No

Protection category: III

Isolation: 0.75 kVDC; Vin ⇔ Ethernet Ports | Vin ⇔ housing

Port count (RJ45)	5	8
Power usage (W)	@24VDC 0,75 2,4	1,5 3,5
Min Max	@24VAC 1,0 2,9	1,8 3,9
Input current (mA)	@24VDC 35 100	60 145
Min Max	@24VAC 70 200	120 290
Inrush current (A)	16	16

Mechanical properties

Housing material: Anodised aluminium, stainless steel

Mounting: 35mm DIN rail

IP Protection class (operation): IP30 (not part of the UL approval)

Port count (RJ45)	5	8
Width (mm)	42	58
Height (mm)	105	105
Depth (mm)	32.5	32.5
Weight (g)	230	280

Ethernet Interfaces

IEEE Standards: 802.3 10Base-T, 100Base-TX, 1000Base-T

Isolation: 0.75 kVDC; Ethernet Port ⇔ housing | Port ⇔ Port

Connection type: RJ45

Port Count | Speed: 5,8 Ports | 10/100/1000 Mbit/s

Cable length: 100 m (Twisted Pair, 0.14 mm² - 0.22 mm², Cat 5)

EMC and environmental specifications

Operating temperature: -40°C to 70°C

Storage temperature: -40°C to 85°C

Relative humidity (operation): 0%-95% (not condensing)

Relative humidity (storage): 0%-95% (not condensing)

Atmospheric pressure (operation): 2,000 m (795 hPa)

EMC immunity: DIN EN - 61000-6-2, 55024

EMC radiated emission: DIN EN 61000-6-4, 55032

Mechanical stability: DIN EN 61373


Approvals and certifications

CE, DIN EN 60950-1, Listed UL 61010 (US/CA) pending

Status and diagnostic indicators

LED: Link/Activity/Speed per Port

Drawing

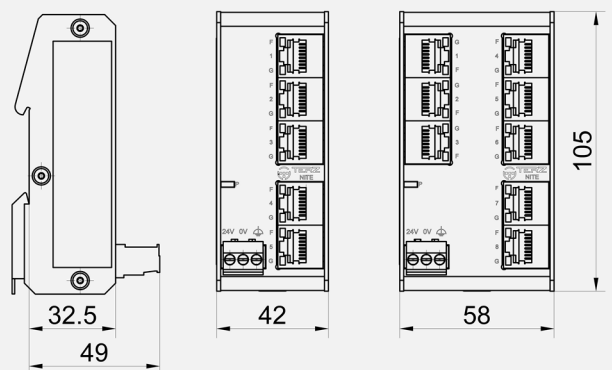

Products

Article	Art.-No.	Specification
NITE-RF5-2100	121400	5xRJ45, IP30, GE
NITE-RF8-2100	121600	8xRJ45, IP30, GE
NITE-RF5-2101	121401	5xRJ45, IP30, GE, LLDP Blocking
NITE-RF8-2101	121601	8xRJ45, IP30, GE, LLDP Blocking

Mounting accessories

Adapter for different alignments and wall mounting

